



Style, quality, and durability for your home









Eco friendly



Highest-quality



Highly durable
construction



Constructed
naturally



Installed
using glue



Suitable for
heated floors




4 sides beveled



T&G system

Construction

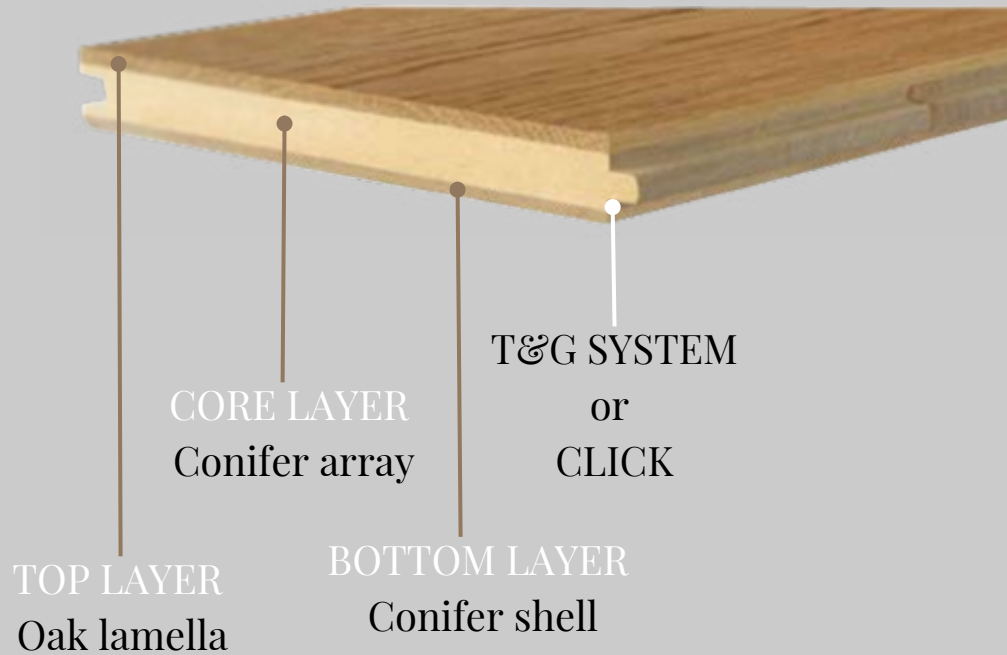

Top layer

UV lacquer

Uvett Clear UM1112 (Sherwin Williams)

Antiscratch UV topcoat for wooden floors.

UM1112 is a topcoat for wood parquet. It gives a very chemical resistant, flexible, tough and low yellowing film. It also has very good resistance against micro-scratches.

Benefits:

- Anti-Scratch
- Low yellowing
- Smooth surface



Natural oil



HARDWAX-OIL ORIGINAL (Osmo)

- Extremely durable and hardwearing.
- Very water, dirt and abrasion resistant.
- Enhances the wood's natural character.
- Highly resistant to common liquid spillages such as water, juice, tea, cola and wine.
- Saliva-resistant and sweatproof.
- Microporous, breathable finish which does not crack, peel, flake or blister.

Technical data

Coating	Natural Oil or UV Lacquer
Brushing	Yes
Beveling, 4V	Yes
Installation system	Tongue and groove (T&G)
Suitable for under-floor heating/cooling	Yes
Heat resistance	0,12 m ² K/W
Density	690 kg/m ³
Number of boards per pack, pcs	Planks/Herringbone - 8

Branching



MODERN

Branches without any limitation of size or quantity are allowed. Cracks of various lengths are allowed on the board or at its ends, with an opening of up to 10 mm. Discoloration is possible. Sapwood is allowed no further than 5 mm from the edge of the board.

Branching



RUSTIC

Healthy branches up to 70 mm wide, knots up to 30 mm wide (no closer than 10 mm from the edge of the board) and healthy core are allowed. Slight discoloration and cracks up to 200 mm long and up to 5 mm wide are allowed.

Branching



NATURE

Healthy branches up to 40 mm, knots – up to 20 mm in size, (not closer than 10 mm from the edge of the board). A minor change in colour and cracks up to 150 mm in length and up to 5 mm width are allowed.


Branching



SELECT

Healthy branches up to 20 mm in size and knots up to 10 mm in size (not closer than 20 mm from the edge of the board) are allowed. 50 % of the surface without any branches, there may be a slight change in colour on the rest of the surface.

Dimensions

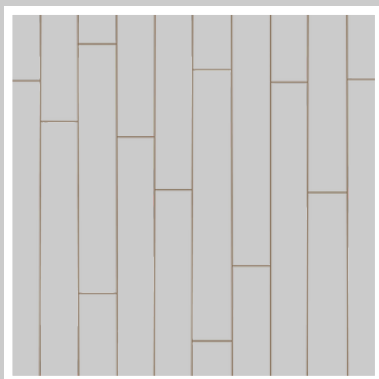

Planks

120*1000-1200*12/14 mm


140*1000-2000*12/14 mm

160*1600-2400*12/14 mm

180*1600-2400*12/14 mm

200*1600-2400*12/14 mm

240*1600-2400*12/14 mm

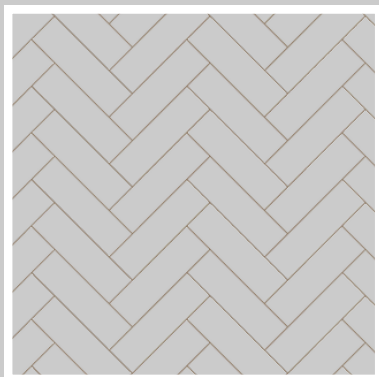

Herringbone

120*550/600/900/1000/1200*12/14 mm

140*550/600/900/1000/1200*12/14 mm

160*550/600/900/1000/1200*12/14 mm

180*550/600/900/1000/1200*12/14 mm

